

intrinsically safe level transmitter, ATEX version, accuracy 0,5 %



II 1 G Ex ia IIC Ex ia III C

Certificate :
0425 ATEX 2635

8.XLV

Ignition protection Ex ia as per EN 60079-0, EN 60079-11, EN 60079-26, atmosphere type G :

- category 1, marking **II 1 GD Ex ia IIC Ex ia III C (cod. 1GD)**;

Temperature classes ⁽¹⁾,

-T6 (T85°C)Ta ≤ 60 °C (**cod. T6B**).

Measuring ranges: 0...1/0...25 bar, relative.

Output signal: 4...20 mA (**cod. 1**).

Non-linearity (BFSL): ≤ ± 0,25 % of the range, according to IEC 61298-2.

Non-repeatability: ≤ 0,15 % of the range, according to IEC 61298-2.

Accuracy: ≤ ± 0,5% of the range ⁽²⁾.

Thermal drift: between 0 and 80°C, 1% of span; 2,5% of span, max ⁽⁴⁾.

Long term drift: ≤ 0,2 % of span.

Stocking temperature: -10...+60 °C.

Response time: <4 ms (measuring); <150 ms (switching on).

Emission and immunity: according to EN 61326,

(group 1 - class B; industrial applications).

Vibration resistance: 20g (10...2000 Hz, according to IEC 60068-2-6).

Shock resistance: 40g (6 ms, according to IEC 60068-2-27).

Sensor: piezoresistive cell for pressure ranges < 1 bar;
ceramic cell for pressure ranges ≥ 1 bar.

Filling fluid of piezoresistive cell: silicone oil.

Case: in AISI 316L, vented up to 16 bar.

Sensor gasket: VITON (**Cod. FPM**).

Electric connection: poliurethane cable, compensated.

Protection: submersible.

Weight:

for pressure ranges 1 bar = 0,28 kg;

for pressure ranges ≥ 0,6 bar = 0,22 kg.


(1) "Tp" : fluid process temperature ≤ "Ta" : ambient temperature;
"Tp" & "Ta" ≥ -20 °C.

(2) max measuring error according to IEC 61298-2, including non-linearity and hysteresis (limit-point calibration and reference conditions according to IEC 61298-1); accuracy ≤ ± 0,75% of span for measuring ranges 0...1 bar and 0...600 bar.

(3) + 0,5% of span for measuring range 1 bar

Ranges relative (1)
0...0,1/0...≤ 0,6
0...> 0,6/0...< 1
0...1/0...2,5
0...4
0...6/0...10
0...16
0...25

(1) Other unit of measurement and intermediate ranges, are available, as requested by customer.


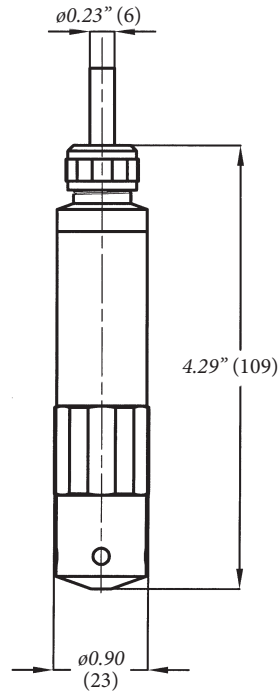


dimensions : inches (mm)

IN ORDER TO IMPROVE THEIR PRODUCTION, MESSRS. NUOVA FIMA RESERVE THE RIGHT TO THEMSELVES TO MAKE ALL THE MODIFICATIONS THAT THEY DEEM INDISPENSABLE AT ANY TIME. UPDATED DATA SHEETS ARE AVAILABLE ON SITE: www.nuovafima.com

Load Resistance

Electrical features	
N. of wires	2
Load (Ohm)	$R_L \leq (U_i - 10) / 0,02$
Supply (U _i)	10...30 Vdc
Max current (I _i)	≤ 100 mA
Max power (P _i)	1,0 W
Capacitance (C _i)	19 nF
Inductivity (L _i)	0 mH

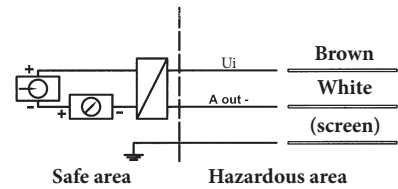

“HOW TO ORDER” SEQUENCE

Section / Model / Range / Output signal / Classification / Temperature / Cable type / Gasket
8 XLV 1 IGD T6B I FPM

